

DISTRIBUTOR



SECMAIR
FAYAT GROUP



TOPSPRAYER 1050

COMPACT HIGH TECHNOLOGY EMULSION DISTRIBUTOR



VERSATILITY

- Tack coat, fog seal, Chipseal TOPSPRAYER is designed for light liquid application
- Application with either spray bar or hand lance



RELIABILITY

- Components selected for their resistance and easy to use and to maintain
- Casing of the main components



ERGONOMY

- Rear platform: ergonomic and secured access to the manhole
- In cab control: joystick with armrest, 7" ergonomic screen to access to the different functions



EFFICIENCY

- Foldable spraying bar with hydraulic lifting jacks
- Total spraying width 13.77 ft
- The short distance between pump and spray bar associated with the cleaning system prevent from clogging



ECONOMY

- Tank insulation of 4 inches in rockwool layer with high density protected by a aluminium sheet cover
- Accurate application rate thanks to electronic asphalt pump speed control



SIMPLICITY


- Day One driveability for non-CDL personnel
- User friendly controls in cab
- Quick access to the different controls and components

MAIN FEATURES



MORE VIDEOS
OF OUR PRODUCTS
ON OUR YOUTUBE
CHANNEL

Binder type	Bitumen emulsion: Cationic or/and Anionic - RS/MS/SS
Emulsion tank capacity	1050 US Gal
Emulsion tank insulation	4 inches in rockwool layer with high density protected by a aluminium sheet cover
Heating system	Diesel burner: Automatically controlled Diesel oil burner with electric ignition 21 Gallons independant diesel oil tank «U» shape heating tube Stainless steel exhaust Thermometer 30 – 200 °F
Application rate range	From 0.02 to 0.37 Gal/SQY
Spray bar	13.77 feet (foldable)
Hand lance	50 feet hose on automatic reel Handlance stand integrated to the rearplatform
Control	In cab with joystick and ergonomic screen
Truck	2 axles - Day One driveability for non-CDL personnel

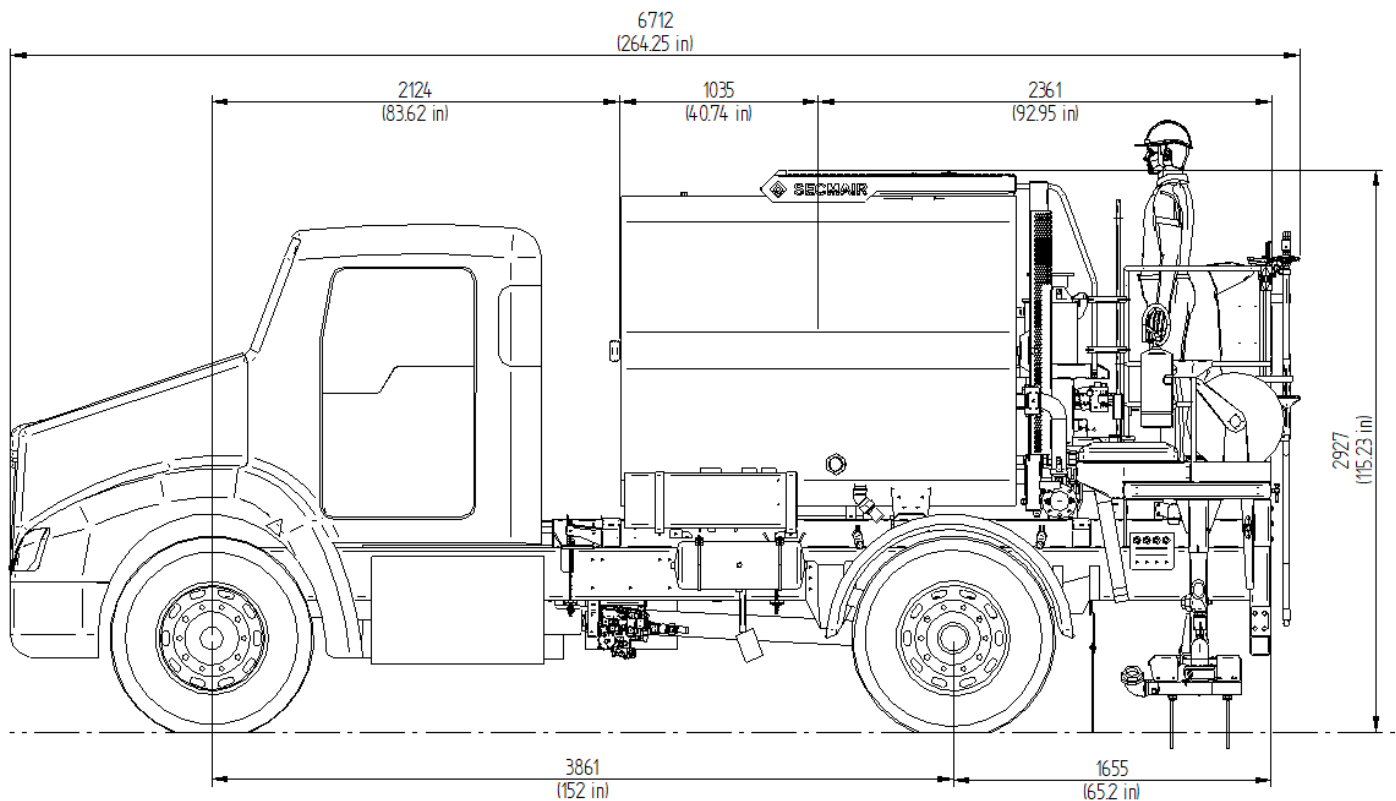

SECMAIR North America

342 Patricia Ln STE 104, Fort Mill, SC 29708

info@secmair.fayat.com - secmair.fayat.com

